



SEKARGUNA MEDIKA



**BROCHURE
INPROMED**

Surgical Light with Ceiling Double Dome - 5 INP 5x5 F - Master

Product Name : Surgical Light with Ceiling Double Dome - 5
Merk : Inpromed-Brazil
Types of Products : INP 5x5 F - Master
AKL Kemenkes RI : 21603025010

INPROMED

Feature

- The Surgical Light INP-Master and SL300 consist of fiberglass flame-retardant domes, designed for high performance in the operative field
- Focusing System Adjustable through a Removable and Autoclavable Focusing Handle, the LED Bulbs are connected in parallel so that should one bulb fail, the others remain on
- LED Specially designed for medical applications with adjustable color temperature from 3200K to 5000K
- The equipment can be made only with monochrome white LED's with fixed color temperature of 5000K. Which allows to differentiate the tissue with an accurate color reproduction does not change the natural color of the blood or other tissue during surgery
- The Digital Control Panel INP-Master and SL300 allows the user full control of the main functions of the equipment ON/OFF. Light intensity Adjustment (Dimmer), Warns the Activations of Emergency System (Optional). Color Temperature Exchange (Optional), ENDO model (Optional)
- The equipment Movements are made through articulated arms that work with spring system for the movement of Torsion, Flexion, Swivel, Vertical and Circular, allowing for rotation up to 360°
- The optional Emergency System keeping equipment in service for 180 minutes on power failure
- Ceiling type, 2 arm (5 bulb dan 5 bulb)
- LED lamp

Spesifikasi

- Number of Bulbs (Per Dome) : 5 + 5
- Maximum Luminance (K=1000) : 160K ± 10%
Lux (Per Dome)
- Color Temperature (K =Kelvin) : 3000K to 5700K ± 10%
- Color Reproduction Index (RA) : 95 ± 5
- Power (VA) : 270
- Voltage / Power per Bulb : 21 V
- Power Voltage Automatic BiVolt : (110-127 / 220-230)
- Input Frequency : 50/60 Hz
- Emergency System : Up to 210 minutes
- IP Grade : IP 54
- Autoclavable Focusing Handle : Yes
- Digital Panel : Yes
- ENDO Mode : Optional



Surgical Light with Ceiling Compost Double INP 5x3 F - Master

Product Name : Surgical Light with Ceiling Compost Double
Merk : Inpromed-Brazil
Types of Products : INP 5x3 F - Master
AKL Kemenkes RI : 21603025213

INPROMED

Feature

- Adjustable Color Temperature
- Fixed Color Temperature
- The Surgical Light INP-Master and SL300 consist of fiberglass flame-retardant domes, designed for high performance in the operative field
- Focusing System Adjustable through a Removable and Autoclavable Focusing Handle, the LED Bulbs are connected in parallel so that should one bulb fail, the others remain on
- LED Specially designed for medical applications with adjustable color temperature from 3200K to 5000K
- The equipment can be made only with monochrome white LED's with fixed color temperature of 5000K. Which allows to differentiate the tissue with an accurate color reproduction does not change the natural color of the blood or other tissue during surgery
- The Digital Control Panel INP-Master and SL300 allows the user full control of the main functions of the equipment ON/OFF. Light intensity Adjustment (Dimmer), Warns the Activations of Emergency System (Optional). Color Temperature Exchange (Optional), ENDO model (Optional)
- The equipment Movements are made through articulated arms that work with spring system for the movement of Torsion, Flexion, Swivel, Vertical and Circular, allowing for rotation up to 360°
- The optional Emergency System keeping equipment in service for 180 minutes on power failure
- Ceiling type, 2 arm (5 bulb dan 3 bulb)
- LED lamp

Spesifikasi

- Type Of Lighting : LED
- Light Intensity (Lx) : 160.000 + 120.000
- Light Intensity Adjustment : 10-100
- Bulb Life (hours) : 90.000 hours
- Number of Domes : 2
- Number of Bulbs (Per Dome) : 5 + 3
- Maximum Luminance (K=1000) : 160K ± 10%
Lux (Per Dome) : + 100K to 120K ± 10%
- Color Temperature (K =Kelvin) : 3000K to 5700K ± 10%
- Color Reproduction Index (RA) : 95 ± 5
- Power (VA) : 216
- Voltage / Power per Bulb : 21 V
- Power Voltage : (110-127 / 220-230)
- Input Frequency : 50/60 Hz
- Emergency System : Up to 210 minutes
- IP Grade : IP 54
- Autoclavable Focusing Handle : Yes
- Digital Panel : Yes
- ENDO Mode (Optional)



Surgical Light with Ceiling Single Dome - 5

INP 5 F - Master

Product Name : Surgical Light with Ceiling Single Dome - 5
Merk : Inpromed-Brazil
Types of Products : INP 5 F - Master
AKL Kemenkes RI : 21603025149

INPROMED

Feature

- The Surgical Light INP-Master and SL300 consist of fiberglass flame-retardant domes, designed for high performance in the operative field
- Focusing System Adjustable through a Removable and Autoclavable Focusing Handle, the LED Bulbs are connected in parallel so that should one bulb fail, the others remain on
- LED Specially designed for medical applications with adjustable color temperature from 3200K to 5000K
- The equipment can be made only with monochrome white LED's with fixed color temperature of 5000K. Which allows to differentiate the tissue with an accurate color reproduction does not change the natural color of the blood or other tissue during surgery
- The Digital Control Panel INP-Master and SL300 allows the user full control of the main functions of the equipment ON/OFF. Light intensity Adjustment (Dimmer), Warns the Activations of Emergency System (Optional). Color Temperature Exchange (Optional), ENDO model (Optional)
- The equipment Movements are made through articulated arms that work with spring system for the movement of Torsion, Flexion, Swivel, Vertical and Circular, allowing for rotation up to 360°
- The optional Emergency System keeping equipment in service for 180 minutes on power failure
- Ceiling type, single arm (5 bulb)
- LED lamp

Spesifikasi

- Number of Bulbs (Per Dome) : 5
- Light Intensity (Lx) : 160.000
- Maximum Luminance (K=1000) : 160K ± 10%
Lux (Per Dome)
- Bulb Life (hours) : 90.000 hours
- Color Temperature (K =Kelvin) : 3000K to 5700K ± 10%
- Color Reproduction Index (RA) : 95 ± 5
- Power (VA) : 135
- Voltage / Power per Bulb : 21 V
- Power Voltage Automatic BiVolt : (110-127 / 220-230)
- Input Frequency : 50/60 Hz
- Emergency System : Up to 210 minutes
- IP Grade : IP 54
- Autoclavable Focusing Handle : Yes
- Digital Panel : Yes
- ENDO Mode : Optional



Auxiliary Surgical Light 5F Master

INP-5F Master

Product Name : Auxiliary Surgical Light 5F Master
Merk : Inpromed-Brazil
Types of Products : INP-5F Master
AKL Kemenkes RI : 21603023715

INPROMED

Feature

- The Surgical Light INP-Master and SL300 consist of fiberglass flame-retardant domes, designed for high performance in the operative field
- Focusing System Adjustable through a Removable and Autoclavable Focusing Handle, the LED Bulbs are connected in parallel so that should one bulb fail, the others remain on
- LED Specially designed for medical applications with adjustable color temperature from 3200K to 5000K
- The equipment can be made only with monochrome white LED's with fixed color temperature of 5000K. Which allows to differentiate the tissue with an accurate color reproduction does not change the natural color of the blood or other tissue during surgery
- The Digital Control Panel INP-Master and SL300 allows the user full control of the main functions of the equipment ON/OFF. Light intensity Adjustment (Dimmer), Warns the Activations of Emergency System (Optional). Color Temperature Exchange (Optional), ENDO model (Optional)
- The equipment Movements are made through articulated arms that work with spring system for the movement of Torsion, Flexion, Swivel, Vertical and Circular, allowing for rotation up to 360°
- The optional Emergency System keeping equipment in service for 180 minutes on power failure
- Mobile type, 5 bulb

Spesifikasi

- Technical Data : 160.000
- Colour Temperature (K) : 3000 - 5700
- Colour Reproduction IRC (%) : 95 ± 3
- Focusable Light Field (mm) : 100 - 360
- Frequency (Hz) : 50/60
- Voltage (V) : 110-127 / 220-230V
- Type of lighting : LED
- LED Life (hours) : 90.000
- Number of Domes : 1
- Number of Bulbs (Per Dome) : 5
- Maximum Luminance (K-1000) : 160K ±10%
- Power (VA) : 135
- Voltage / Power Per Bulb : 21V
- Power Voltage Automatic BiVolt : (110 - 127 / 220 - 230)
- Emergency System : Up to 210 Minutes
- Light intensity Adjustment (%) : 10 -100
- Degree of Protection : IP 54
- Height (m) (Auxiliary Model) : 1.92
- Autoclavable Focusing Handle : Yes
- Digital Panel : Yes
- ENDO Mode (Optional)



Auxiliary Surgical Light 3F Master INP-3F Master

Product Name : Auxiliary Surgical Light 3F Master
Merk : Inpromed-Brazil
Types of Products : INP-3F Master
AKL Kemenkes RI : 21603023663

INPROMED

Feature

- The Surgical Light INP-Master and SL300 consist of fiberglass flame-retardant domes, designed for high performance in the operative field
- Focusing System Adjustable through a Removable and Autoclavable Focusing Handle, the LED Bulbs are connected in parallel so that should one bulb fail, the others remain on
- LED Specially designed for medical applications with adjustable color temperature from 3200K to 5000K
- The equipment can be made only with monochrome white LED's with fixed color temperature of 5000K. Which allows to differentiate the tissue with an accurate color reproduction does not change the natural color of the blood or other tissue during surgery
- The Digital Control Panel INP-Master and SL300 allows the user full control of the main functions of the equipment ON/OFF. Light intensity Adjustment (Dimmer), Warns the Activations of Emergency System (Optional). Color Temperature Exchange (Optional), ENDO model (Optional)
- The equipment Movements are made through articulated arms that work with spring system for the movement of Torsion, Flexion, Swivel, Vertical and Circular, allowing for rotation up to 360°
- The optional Emergency System keeping equipment in service for 180 minutes on power failure
- Mobile type, 3 bulb

Spesifikasi

- Technical Data : 120.000
- Colour Temperature (K) : 3000 - 5700
- Colour Reproduction IRC (%) : 95 ± 3
- Focusable Light Field (mm) : 100 - 360
- Frequency (Hz) : 50/60
- Voltage (V) : 110-127 / 220-230V
- Type of lighting : LED
- LED Life (hours) : 90.000
- Number of Domes : 1
- Number of Bulbs (Per Dome) : 3
- Maximum Luminance (K-1000) LUX (Per Dome) : 100K to 120K ±10%
- Power (VA) : 81
- Voltage / Power Per Bulb : 21V
- Power Voltage : (110 - 127 / 220 - 230)
- Emergency System : Up to 210 Minutes
- Light intensity Adjustment (%) : 10 -100
- Degree of Protection : IP 54
- Height (m) (Auxiliary Model) : 1.92
- Autoclavable Focusing Handle : Yes
- Digital Panel : Yes
- ENDO Mode (optional)



Auxiliary Surgical Light - 300 SL-300

Product Name : Auxiliary Surgical Light - 300
Merk : Inpromed-Brazil
Types of Products : SL-300
AKL Kemenkes RI : 21603024007

INPROMED

Feature

- The Surgical Light INP-Master and SL300 consist of fiberglass flame-retardant domes, designed for high performance in the operative field
- Focusing System Adjustable through a Removable and Autoclavable Focusing Handle, the LED Bulbs are connected in parallel so that should one bulb fail, the others remain on
- LED Specially designed for medical applications with adjustable color temperature from 3200K to 5000K
- The equipment can be made only with monochrome white LED's with fixed color temperature of 5000K. Which allows to differentiate the tissue with an accurate color reproduction does not change the natural color of the blood or other tissue during surgery
- The Digital Control Panel INP-Master and SL300 allows the user full control of the main functions of the equipment ON/OFF. Light intensity Adjustment (Dimmer), Warns the Activations of Emergency System (Optional). Color Temperature Exchange (Optional), ENDO model (Optional)
- The equipment Movements are made through articulated arms that work with spring system for the movement of Torsion, Flexion, Swivel, Vertical and Circular, allowing for rotation up to 360°
- The optional Emergency System keeping equipment in service for 180 minutes on power failure
- Mobile type
- Examination lamp

Spesifikasi

- Technical Data : 100.000
- Colour Temperature (K) : 3200 - 5000
- Colour Reproduction IRC (%) : 95 ± 3
- Focusable Light Field (mm) : 100 - 230
- Frequency (Hz) : 50/60
- Voltage (V) : 110-127 / 220-230V
- Type of lighting : LED
- LED Life (hours) : 90.000
- Number of Domes : 1
- Number of Bulbs (Per Dome) : 1
- Maximum Luminance (K-1000) LUX (Per Dome) : 50K to 100K : ±10%
- Power (VA) : 75
- Voltage / Power Per Bulb : 21V
- Power Voltage : (110 - 127 / 220 - 230)
- Emergency System : Up to 210 Minutes
- Light intensity Adjustment (%) : 10 -100
- Degree of Protection : IP 54
- Height (m) (Auxiliary Model) : 1.92
- Autoclavable Focusing Handle : Yes
- Digital Panel : Yes
- ENDO Mode (Optional)



Electrical Surgical Table Standard INP-ME-500

Product Name : Electrical Surgical Table Standard
Merk : Inpromed-Brazil
Types of Products : INP-ME 500
AKL Kemenkes RI : 21603022404

INPROMED

Feature

- Motorized and Electric-Hydraulic INPROMED Surgical Table
- T base with AISI 304 (Chrome-Nickel) stainless steel plate, ABS or fiberglass coating
- The base is moved using casters
- Contributing to patient safety and of users
- The Table top of the Surgical Table is radiolucent for use with image intensifier (C-arc) and X-rays throughout its length
- The chassis structure is manufactured in profile or tubular, made of AISI 304 stainless steel (Chrome-Nickel), or carbon fiber and/or SAE 1020 steel painted with epoxy paint
- The Surgical Table column is made with a revolutionary system of linear guides used in the most modern equipment and machines where great precision, speed and low friction coefficient are required

Standard Accessories

- Pair of Brace of Thighs
- Pair of Shoulder Support
- Anesthetic Screen Frame
- Pair of Arm Support

Optional Accessories

- Gynecological Set
- Ophthalmological Set
- Orthopedic Set

Spesifikasi

- Number of Electrical Actuators : 5
- Longitudinal Slip : Electrical
- Lifting Movement : Electrical
- Trendelenburg / Reverse Trendelenburg : Electrical
- Lateral Movement : Electrical
- Back Movement : Electrical
- Leggings Movement : Hydraulic
- Head Movement : Hydraulic



Electrical Surgical Table with Gynecological / Ophthalmological Set INP-ME-500

Product Name : Electrical Surgical Table with Gynecological/
Ophthalmological Set
Merk : Inpromed-Brazil
Types of Products : INP-ME 500
AKL Kemenkes RI : 21603022404

INPROMED

Feature

- Motorized and Electric-Hydraulic INPROMED Surgical Table
- T base with AISI 304 (Chrome-Nickel) stainless steel plate, ABS or fiberglass coating
- The base is moved using casters
- Contributing to patient safety and of users
- The Table top of the Surgical Table is radiolucent for use with image intensifier (C-arc) and X-rays throughout its length
- The chassis structure is manufactured in profile or tubular, made of AISI 304 stainless steel (Chrome-Nickel), or carbon fiber and/or SAE 1020 steel painted with epoxy paint
- The Surgical Table column is made with a revolutionary system of linear guides used in the most modern equipment and machines where great precision, speed and low friction coefficient are required

Standard Accessories

- Pair of Brace of Thighs
- Pair of Shoulder Support
- Anesthetic Screen Frame
- Pair of Arm Support

With Gynecological / Ophthalmological Set




Gynecological Set



Ophthalmological Set

Spesifikasi

- Number of Electrical Actuators : 5
- Longitudinal Slip : Eletrical
- Lifting Movement : Eletrical
- Trendelenburg / Reverse Trendelenburg : Eletrical
- Lateral Movement : Eletrical
- Back Movement : Eletrical
- Leggings Movement : Hydraulic
- Head Movement : Hydraulic

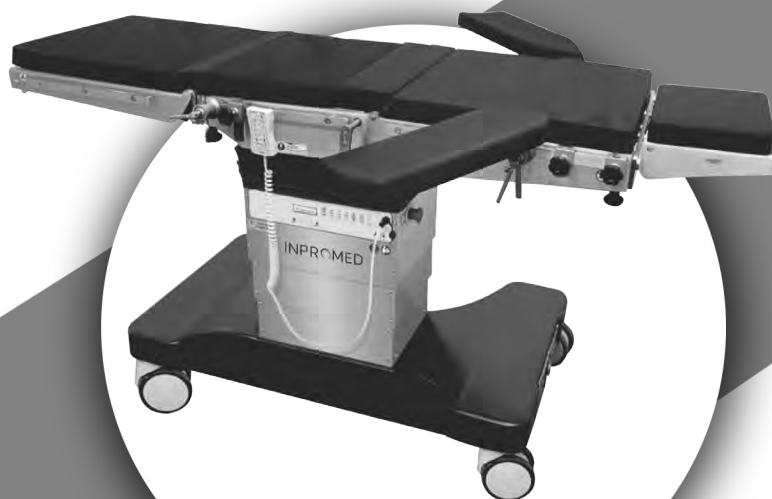

Electrical Surgical Table with Orthopedic Set INP-ME-500

Product Name : Electrical Surgical Table with Orthopedic Set
Merk : Inpromed-Brazil
Types of Products : INP-ME 500
AKL Kemenkes RI : 21603022404

INPROMED


Feature

- Motorized and Electric-Hydraulic INPROMED Surgical Table
- T base with AISI 304 (Chrome-Nickel) stainless steel plate, ABS or fiberglass coating
- The base is moved using casters
- Contributing to patient safety and of users
- The Table top of the Surgical Table is radiolucent for use with image intensifier (C-arc) and X-rays throughout its length
- The chassis structure is manufactured in profile or tubular, made of AISI 304 stainless steel (Chrome-Nickel), or carbon fiber and/or SAE 1020 steel painted with epoxy paint
- The Surgical Table column is made with a revolutionary system of linear guides used in the most modern equipment and machines where great precision, speed and low friction coefficient are required

Standard Accessories

- Pair of Brace of Thighs
- Pair of Shoulder Support
- Anesthetic Screen Frame
- Pair of Arm Support

With Orthopedic Set

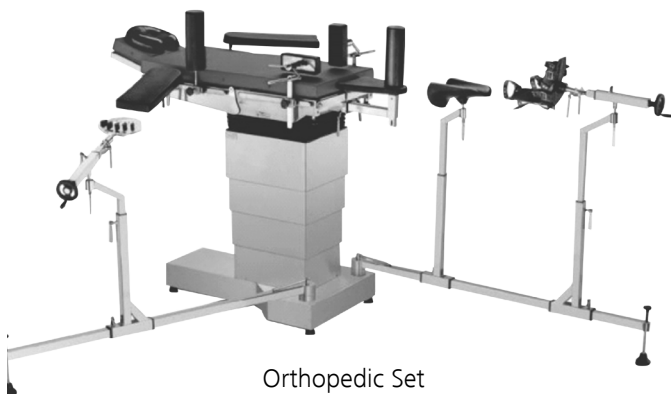

Orthopedic Set

Spesifikasi

- Number of Electrical Actuators : 5
- Longitudinal Slip : Eletrical
- Lifting Movement : Eletrical
- Trendelenburg / Reverse Trendelenburg : Eletrical
- Lateral Movement : Eletrical
- Back Movement : Eletrical
- Leggings Movement : Hydraulic
- Head Movement : Hydraulic

